

HVORDAN VELGE DIN JUNIPER THIN SURFACE MOUNT

1. Utførelse



1. SATIN BRASS



2. BLACK OXIDE



3. SATIN NICKEL

2. Lengde



60.96 cm (24 inches)



91.44 cm (36 inches)

3. Antall moduler


1 MODUL à 60.96 cm

TOTAL LENGDE: 68.36 cm (1 x 60.96 cm + 2 fester à 3.7 cm)



2 MODULER à 60.96 cm

TOTAL LENGDE: 129.32 cm (2 x 60.96 cm + 2 fester à 3.7 cm)



3 MODULER à 60.96 cm

TOTAL LENGDE: 190.28 cm (3 x 60.96 cm + 2 fester à 3.7 cm)




1 MODUL à 91.44 cm

TOTAL LENGDE: 98.84 cm (1 x 91.44 cm + 2 fester à 3.7 cm)



2 MODULER à 91.44 cm

TOTAL LENGDE: 190.28 cm (2 x 91.44 cm + 2 fester à 3.7 cm)



3 MODULER à 91.44 cm

TOTAL LENGDE: 281.72 cm (3 x 91.44 cm + 2 fester à 3.7 cm)



Modulene kan også kombineres på andre måter. Ta kontakt for mer informasjon.

HVORDAN VELGE DIN JUNIPER THIN SURFACE MOUNT

4. Avstandsfester



4.5 cm




9 cm



18 cm

5. Fargetemperatur på integrert LED

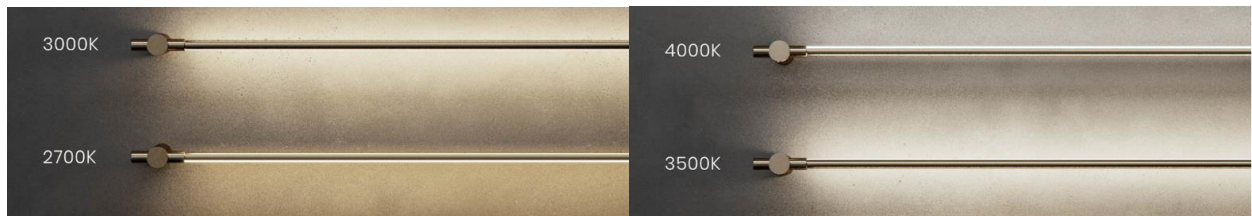


I NORGE FORETREKKER DE FLESTE 2700 KELVIN ELLER 3000 KELVIN

6. Strømforsyning

For veggpunkt (Standard Remote, 2-Wire / TRIAC / Forward-Phase, 0-10V, ELV) **B**

OBS! Driveren må plasseres eksternt tilgjengelig for vedlikehold/utskifting

For stikkontakt (Plug-in Power Supply, 24VDC) **G**

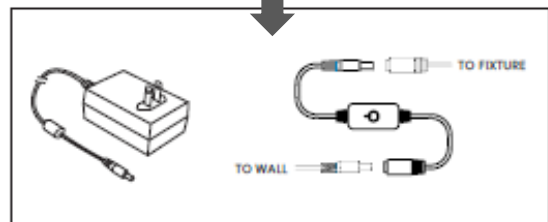

OPTIONAL PLUG-IN POWER SUPPLY WITH IN-LINE TOUCH DIMMER & 3-METER CORD

7. Driver/dimmemulighet

2-wire/Triac/FWD eller 0-10V